



Location of Use: String box, Inverter
 Mode of Protection: (+) - PE, (-) - PE, (+) - (-)
 EN/UL Category: Type 1, Type 2 / Type 1CA
 Housing: Pluggable Design
 Compliance: EN 50539-11:2013+A1:2014
 UL 1449 4th Edition

ProTec T1-xxxxPV-3+0(-R)**1100****1500****EN Electrical**

Maximum Continuous Operating Voltage (PV)	U_{OPV}	1100 V	1500 V
Nominal Discharge Current (8/20 μ s)	I_n	20 kA	20 kA
Impulse Discharge Current (10/350 μ s)	I_{imp}	6.25 kA	5 kA
Specific Energy	W/R	9.77 kJ/ Ω	6.25 kJ/ Ω
Charge	Q	3.125 As	2.5 As
Total Discharge Current (10/350 μ s)	I_{Total}	12.5 kA	10 kA
Total Discharge Current (8/20 μ s)	I_{Total}	50 kA	40 kA
Maximum Discharge Current (8/20 μ s)	I_{max}	40 kA	30 kA
Voltage Protection Level	(+) - PE, (-) - PE U_p	3800 V	5000 V
	(+) - (-) U_p	3800 V	5000 V
Response Time	t_A	< 25 ns	
Short-Circuit Current Rating	I_{SCP}	11 kA	
Number of Ports		1	

UL Electrical

Maximum Permitted DC Voltage	V_{pdc}	1100 V	1500 V
Voltage Protection Rating	(+) - G, (-) - G V_{PR}	2500 V	4000 V
	(+) - (-) V_{PR}	2500 V	4000 V
Nominal Discharge Current (8/20 μ s)	I_n	20 kA	
Short-Circuit Current Rating	SCCR	50 kA	65 kA

Mechanical & Environmental

Operating Temperature Range	T_a	-40 °F to +185 °F [-40 °C to +85 °C]	
Permissible Operating Humidity	RH	5%...95%	
Altitude (max)		13123 ft [4000 m]	
Terminal Screw Torque	M_{max}	39.9 lbf-in [4.5 Nm]	
Conductor Cross Section (max)		2 AWG (Solid, Stranded) / 4 AWG (Flexible)	
		35 mm ² (Solid, Stranded) / 25 mm ² (Flexible)	
Mounting		35 mm DIN Rail, EN 60715	
Degree Of Protection		IP 20 (built-in)	
Housing Material		Thermoplastic: Extinguishing Degree UL 94 V-0	
Thermal Protection		Yes	
Operating State / Fault Indication		Green Flag / Not Green Flag	
Remote Contacts (RC)		Optional	
RC Switching Capacity		AC: 250V/1A, 125V/1A; DC: 48V/0.5A, 24V/0.5A, 12V/0.5A	
RC Conductor Cross Section (max)		16 AWG (Solid) / 1.5 mm ² (Solid)	

Order Information


Order Code	1100	1500
ProTec T1-xxxxPV-3+0	59.0285	59.0289
ProTec T1-xxxxPV-3+0-R (with remote contacts)	59.0286	59.0290
ProTec T1-550PV-P (middle plug)	59.0283	-
ProTec T1-550PV-M-P (side plug)	59.0284	-
ProTec T1-750PV-P (middle plug)	-	59.0287
ProTec T1-750PV-M-P (side plug)	-	59.0288

ProTec T1-PV 3+0


Internal Configuration

Legend

+/-, -/+ + or - Conductor Terminal
 PE/G Conductor Terminal
 RC Remote Contacts Terminal (Optional)
 TD Thermal Disconnecter

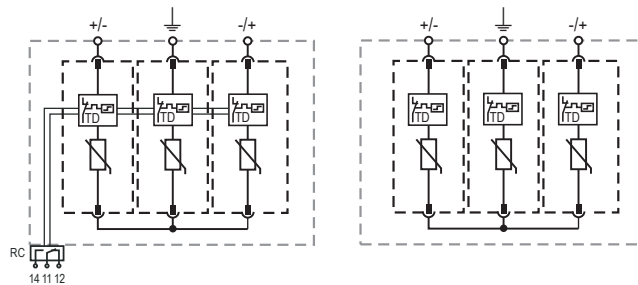

Complete Unit

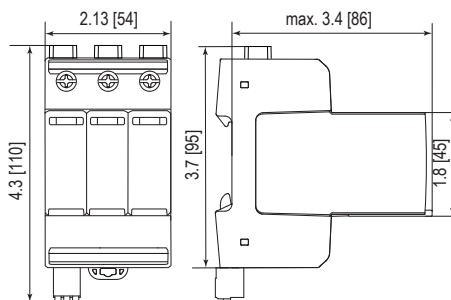


Complete Unit Dimensions & Packaging


ProTec T1-xxxxPV-3+0		1100	1500
Weight	pounds	.968	1.034
	grams	439	469
ProTec T1-xxxxPV-3+0-R			
Weight	pounds	.979	1.045
	grams	444	474
DIN 43880 Dimension		3 TE / 2.13" [54]	
Packaging Dimensions (H x W x L)		4.3 x 4.5 x 13.8" [109 x 115 x 352 mm]	
Standard Order Quantity		5 Units	

Plug Internal Configuration

ProTec T1-xxxPV-P
 ProTec T1-xxxPV-M-P



Spare Plug



Single Unit Dimensions & Packaging

ProTec T1-xxxPV-P		550	750
Weight	pounds	.220	.282
	grams	100	128
ProTec T1-xxxPV-M-P		550	750
Weight	pounds	.194	.196
	grams	88	89
DIN 43880 Dimension		1 TE / .71" [18]	
Packaging Dimensions (H x W x L)		4.3 x 4.5 x 13.8" [109 x 115 x 352 mm]	
Standard Order Quantity		28 Units	

inches
 [mm]

Information contained in this document is subject to
 change at any time without notice.



Raycap

www.raycap.com

© 2019 Raycap All rights reserved.
 G29-00-432 191210

ProTec T2-PV 3+0

Type 2 • Type 1CA



Location of Use: String box, Inverter
 Mode of Protection: (+) - PE, (-) - PE, (+) - (-)
 EN/UL Category: Type 2 / Type 1CA
 Housing: Pluggable Design
 Compliance: EN 50539-11:2013+A1:2014
 UL 1449 4th Edition

Technical Data**ProTec T2-xxxxPV-3+0(-R)****1100****1500****EN Electrical**

Maximum Continuous Operating Voltage (PV)	U_{CPV}	1100 V	1500 V
Nominal Discharge Current (8/20 μ s)	I_n	20 kA	
Maximum Discharge Current (8/20 μ s)	I_{max}	40 kA	30 kA
Total Discharge Current	I_{Total}	50 kA	40 kA
Voltage Protection Level	U_p	3800 V	5000 V
Response Time	t_A	< 25 ns	
Short-Circuit Current Rating	I_{SCP}	11 kA	
Number of Ports		1	

UL Electrical

Maximum Permitted DC Voltage	V_{pdc}	1100 V	1500 V
Voltage Protection Rating	VPR	2500 V	4000 V
Nominal Discharge Current (8/20 μ s)	I_n	20 kA	
Short-Circuit Current Rating	SCCR	50 kA	65 kA

Mechanical & Environmental

Operating Temperature Range	T_a	-40 °F to +185 °F [-40 °C to +85 °C]	
Permissible Operating Humidity	RH	5%...95%	
Altitude (max)		13123 ft [4000 m]	
Terminal Screw Torque	M_{max}	39.9 lbf-in [4.5 Nm]	
Conductor Cross Section (max)		2 AWG (Solid, Stranded) / 4 AWG (Flexible) 35 mm ² (Solid, Stranded) / 25 mm ² (Flexible)	
Mounting		35 mm DIN Rail, EN 60715	
Degree of Protection		IP 20 (built-in)	
Housing Material		Thermoplastic: Extinguishing Degree UL 94 V-0	
Thermal Protection		Yes	
Operating State / Fault Indication		Green Flag / Not Green Flag	
Remote Contacts (RC)		Optional	
RC Switching Capacity		AC: 250 V / 1 A, 125 V / 1 A; DC: 48 V / 0.5 A, 24 V / 0.5 A, 12 V / 0.5 A	
RC Conductor Cross Section (max)		16 AWG (Solid) / 1.5 mm ² (Solid)	

Order Information


Order Code	1100	1500
ProTec T2-xxxxPV-3+0	59.0292	59.0295
ProTec T2-xxxxPV-3+0-R (with remote contacts)	59.0293	59.0296
ProTec T2-550PV-P (plug)	59.0291	-
ProTec T2-750PV-P (plug)	-	59.0294

ProTec T2-PV 3+0


Internal Configuration

Legend

+/-, -/+	+ or - Conductor Terminal
⏏	PE/G Conductor Terminal
RC	Remote Contacts Terminal (Optional)
TD	Thermal Disconnect

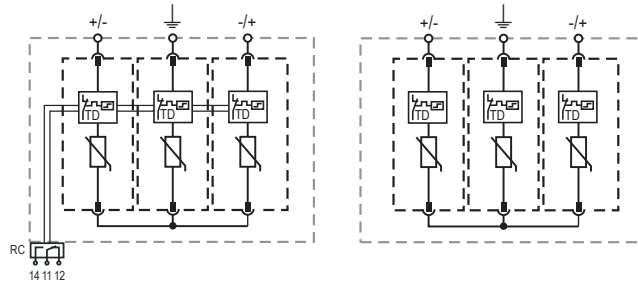

Complete Unit

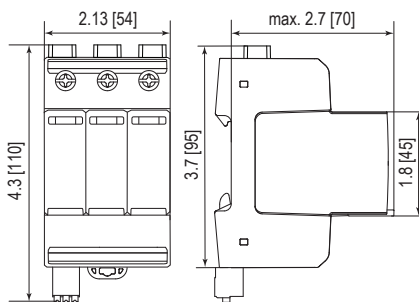


Complete Unit Dimensions & Packaging


ProTec T2-xxxxPV-3+0		1100	1500
Weight	pounds	.806	.879
	grams	366	399
ProTec T2-xxxxPV-3+0-R			
Weight	pounds	.817	.890
	grams	371	404
DIN 43880 Dimension		3 TE / 2.13" [54]	
Packaging Dimensions (HxWxL)		4.3 x 4.5 x 13.8" [109 x 115 x 352 mm]	
Standard Order Quantity		5 Units	

Plug Internal Configuration

ProTec T2-XXXPV-P



Spare Plug



Single Unit Dimensions & Packaging

ProTec T2-xxxPV-P		550	750
Weight	pounds	.150	.174
	grams	68	79
DIN 43880 Dimension		1 TE / .71" [18]	
Packaging Dimensions (HxWxL)		3.2 x 4.5 x 12" [83 x 115 x 305 mm]	
Standard Order Quantity		24 Units	

inches
[mm]

Information contained in this document is subject to
change at any time without notice.



Raycap

www.raycap.com

© 2019 Raycap All rights reserved.
G29-00-433 191210